

KEY FEATURES

- > Suited for public environments
- > 24/7 operations
- > Customisation



MULTIQ 322 TRUEFLAT, MULTI-TOUCH

P-LINE

FLAT DISPLAY SUITED FOR PUBLIC ENVIRONMENTS

MultiQ True-flat is an evolution of our popular MultiQ Classic series monitors, and has the same great features and durability that answers very well to the challenges of public environments.

We have added new features to make this model even greater.

NEW DESIGN

MultiQ True-flat has a new slimmer design, with a frameless anti-reflective glass making touch functions even easier to use, maintain and more precise.

MultiQ True-flat is designed for 24/7 operations and is with its metal housing and anti-reflective glass this model is suited for point of sale and other public environment installations. With the power saving and lead free LED backlight the MultiQ True-flat saves energy costs and the environment.

SEVERAL FEATURES

This monitor also offers several features to improve the ergonomics and installation, such as anti-reflective glass or the projected capacitive multi-touch. With the stand the extended tilting angle further improves the ergonomic options and makes it possible to work standing up.

MultiQ True-flat is a flexible platform with unique possibilities for customization: optional chassis color, logo in print or relief, card reader, integrated speakers etc.

MultiQ 322 has a 5 year warranty to give you the lowest possible cost of ownership.




MULTIQ 322 TRUEFLAT

Technical specifications

P-LINE

DISPLAY	
Panel Type	21,5", LCD TFT
Backlight type	LED
Active display area	
Resolution	1920 x 1080
Brightness	300 cd/m ² (Typ.)
Contrast ratio	3000:1 (typ.)
Viewing angle	178° (H) x 178° (V) (CR 10:1, Typ.)
Number of colors	16.7 Mill (RGB 8-bit)
Response time	25 ms (Tye, on/off.)
Pixel dimension	0,24825(H) x 0,24825 (V) mm
OSD Control	Auto Set, Brightness, Contrast, Color, Position, Image, Miscellaneous
Hot keys functions	Control key locking, Quick brightness and contrast adjustment, Auto Set.
Lamp life	50.000 h (min)
MTBF	50.000 h
INPUT SIGNAL	
Video signal	VGA: Analog 0,7 Vp-p. 75 ohm. DVI: REV 1.0 DisplayPort: Version 1.2
Sync. signal	TTL Level, Positive/Negative, Separate sync (VGA)
Connectors	VGA (15-pols D-sub), DVI-D (24-pole), DP, HDMI adapter, USB (Touch)
POWER	
AC/DC adapter	Input: AC 100~240 V, 50~60Hz Output: +12 V DC, 3 A
Power consumption	25 W (Typ.)
Power management	VESA DPMS Compatible

DIMENSIONS	
With VESA	532,5 (H) x 334,3 (W) x 50,5 (D) mm
WEIGHT (NET)	
With VESA	6,4 kg
ENVIRONMENT	
Operating temperature	0 - 40°C
Operation Humidity	5 - 90%
GENERAL	
Plug & Play	DDC2B
Incl accessories	AC/DC adapter - 1,5 m (black), Power cord - 1,8 m (black), VGA cable - 1,8 m (black), DVI-D cable 1,8m, DP cable 1,8m, DVID-HDMI adapter OPTIONS touch: Serial or USB cable touch - 1,8 m (black) Audio cable
Regulations	Safety: CE, UL, FCC
Warranty	5 years SendIT (excluding power supply)
Security	Kensington locking capability, Table locking (with stand)
OPTIONS	
Touch	Projective capacitive
Glass	Anti-reflective glass
Mounting	VESA (100 x 100) stand
ACCESSORIES	
Stands/brackets	POS-Pole, Wall bracket kit
Speakers	2 x 2.0 W, USB or Analog, HDMI input
MSR	MagTek 3 tracks, USB HID, USB-KeyB, Emu., Serial
Other	Power USB-hub

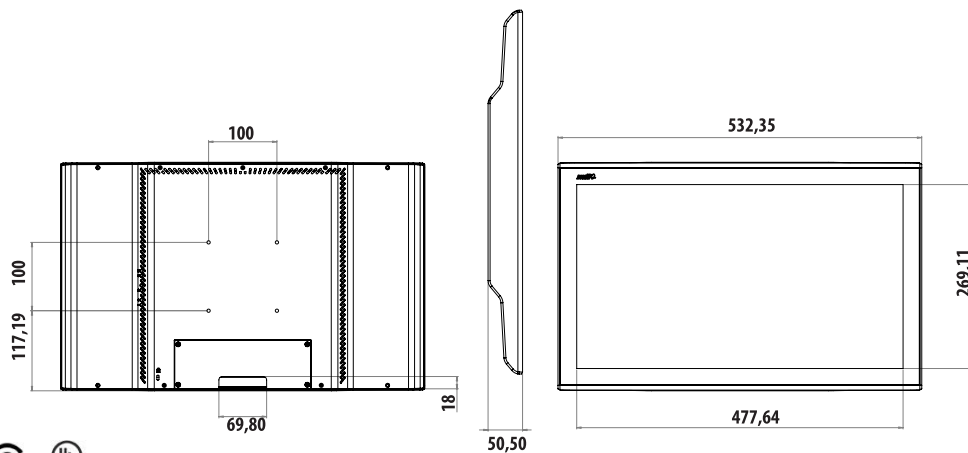

RoHS Comiliant 2002/95/EG

©2013 MultiQ are registered trademarks or trademark applications of MultiQ International AB in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to change the specifications without prior notice.

