



Flat display suited for public environments

MultiQ True-flat is an evolution of our popular MultiQ Classic series monitors, and has the same great features and durability that answers very well to the challenges of public environments. We have added new features to make this model even greater.

MultiQ True-flat has a new design, with a frameless protective glass making touch functions even easier to use, maintain and more precise. The touch technology that is used in this model is projected capacitive multi-touch, which recognizes the presence of two points of simultaneously.

MultiQ True-flat is designed for 24/7 operations and is with

its metal housing and protective glass this model is suited for point of sale and other public environment installations.

With the power saving and lead free LED backlight the MultiQ True-flat saves energy costs and the environment.

This monitor also offers several features to improve the ergonomics and installation, such as that it is available with antireflective glass or without touch. The extended tilting angle further improves the ergonomic options and makes it possible to work standing up.

MultiQ True-flat is a flexible platform with unique possibilities for customisation: optional chassis colour, logo in print or relief, card reader, integrated speakers etc.

MultiQ 215 True-flat, Multi-touch

Technical specifications


P-Line

| Display | |
|---------------------|--|
| Panel type | 15.0", LCD TFT |
| Backlight type | LED |
| Active display area | 304,1 (H) x 228,1 (V) mm |
| Resolution | XGA, 1024 x 768 max. |
| Brightness | 450 cd/m ² (Typ.) |
| Contrast ratio | 700:1 (Typ.) |
| Viewing angle | 160° (H) x 130° (V) (CR 10:1, Typ.) |
| Number of colours | 16.2 Mill, 6 bits + FRC |
| Response time | 8 ms Tr+Tf (Typ.) |
| Pixel dimension | 0,297 (H) x 0,297 (V) mm |
| OSD Control | Auto Set, Brightness, Contrast, Colour, Position, Image, Miscellaneous. |
| Hot keys functions | Control key locking, Quick brightness and contrast adjustment, Auto Set. |
| Lamp life | 50.000 h (min) |
| MTBF | 50.000 h |

| Input Signal | |
|--------------|--|
| Video signal | Analog 0,7 Vp-p. 75 ohm. DVI: REV 1.0 Digital Single T.M.D.S (Transition Minimised Differential Signaling). |
| Sync. signal | TTL Level, Positive/Negative, Separate sync (VGA) |
| Connector | VGA (15-pols D-sub), DVI-D (24-pols), DC-in |

| Power | |
|-------------------|--|
| AC/DC adapter | Input: AC 100~240 V, 50~60Hz Output: +12 V DC, 3 A |
| Power consumption | 14,5 W (Typ.) Power save mode suspend: ≤ 2W Power save mode off: ≤ 1 W |
| Power management | VESA DPMS Compatible |

| Dimension | |
|-----------------|--------------------------------|
| With stand | 317 (H) x 356 (W) x 129 (D) mm |
| With VESA | 283 (H) x 356 (W) x 49 (D) mm |
| Tilt with stand | +70°,-0° |

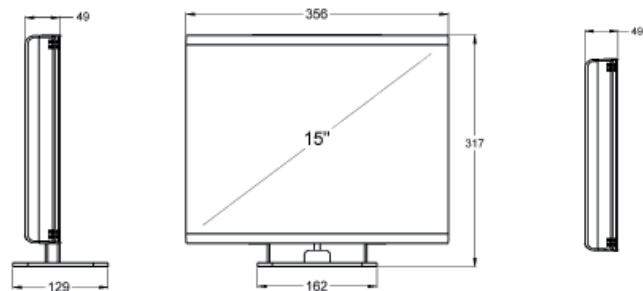

| Weight (Net) | |
|--------------|--------|
| With stand | 5,2 kg |
| With VESA | 4,5 kg |

| Environment | |
|-----------------------|---|
| Operating temperature | 0 - 40°C |
| Transport & Storage | Ambient Temp: -10 - +60°C Humidity Range: 10 - 100% Operating humidity: 8 - 90% |

| General | |
|----------------------|---|
| Plug & Play | DDC2B |
| Included accessories | AC/DC adapter - 1,5 m (black), Power cord - 1,8 m (black), VGA cable - 1,8 m (black), USB cable touch - 1,8 m (black). |
| Regulations | Safety: CE |
| Warranty | 3 years SendIT |
| Security | Table locking (stand), Kensington locking capability. |


| Touch | |
|----------------|--|
| Type | Projective capacitive, 2 point multi-touch. |
| Driver support | Android 2.0, 2.1, 2.2, 2.3 and 4.0 Windows 7 (x86/x64) Windows 8 (x86/x64) Linux with kernel 2.6.32 and above, drivers available as is. |

Options

| Different models | |
|------------------|--------------------------|
| Mounting | VESA (75 x 75 mm), Stand |

| Additional accessories | |
|--|--|
| Swivel plate, POS-Pole, Wall bracket kit | |

| Project options | |
|-----------------|--|
| Speakers | 2 x 1,5 W, Serial or USB input |
| MSR | MagTek 3 tracks, USB, USB-KeyB, Serial |
| Other | Power USB-hub |

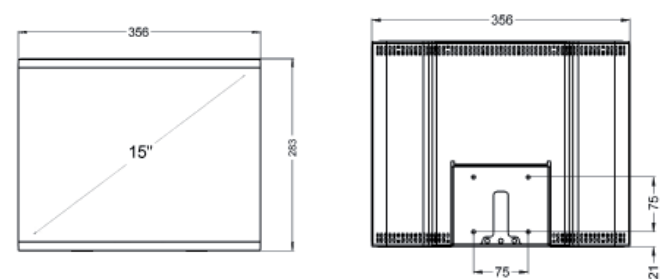

RoHS Compliant 2002/95/EG

©2013 MultiQ are registered trademarks or trademark applications of MultiQ International AB in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to change the specifications without prior notice.