



KEY FEATURES

- > Suited for public environments
- > 24/7 operations
- > Customisation



MULTIQ 322 TRUEFLAT, MULTI-TOUCH

P-LINE

SUITED FOR PUBLIC ENVIRONMENTS

MultiQ have many years of experience within retail and public environment monitor installations. Based on this our monitors answer very well to the challenges of public environments.

MultiQ True-flat is designed for 24/7 operations and with its metal housing and anti-reflective glass this model is suited for point of sale, point of information and other public environment installations.

MODERN SLIM DESIGN

MultiQ True-flat has a new modern, slim design, with a frameless anti-reflective glass making touch functions even easier to use, maintain and more precise. The feel and touch of this product is similar to that of a tablet or smartphone but with a larger screen for a superior customer experience.

MORE FEATURES

MultiQ True-flat saves energy costs and the environment since it has power saving and lead free LED backlight. It also offers several features to improve ergonomics such as a tilt angle that makes it possible to work standing up.

You can easily customize your monitor as MultiQ True-flat is a flexible platform with unique possibilities for customization: optional chassis color, logo in print or relief, card reader, integrated speakers etc.

You can also choose between antireflective glass or projected capacitive multi-touch depending on the intended use.


MULTIQ 322 TRUEFLAT

Technical specifications

P-LINE

DISPLAY	
Panel Type	21,5", LCD TFT
Backlight type	LED
Active display area	
Resolution	1920 x 1080
Brightness	300 cd/m ² (Typ.)
Contrast ratio	3000:1 (typ.)
Viewing angle	178° (H) x 178° (V) (CR 10:1, Typ.)
Number of colors	16.7 Mill (RGB 8-bit)
Response time	25 ms (Tye, on/off.)
Pixel dimension	0,24825(H) x 0,24825 (V) mm
OSD Control	Auto Set, Brightness, Contrast, Color, Position, Image, Miscellaneous
Hot keys functions	Control key locking, Quick brightness and contrast adjustment, Auto Set.
Lamp life	50.000 h (min)
MTBF	50.000 h
INPUT SIGNAL	
Video signal	VGA: Analog 0,7 Vp-p. 75 ohm. DVI: REV 1.0 DisplayPort:Version 1.2
Sync. signal	TTL Level, Positive/Negative, Separate sync (VGA)
Connectors	VGA (15-pols D-sub), DVI-D (24-pole), DP, HDMI adapter, USB (Touch)
POWER	
AC/DC adapter	Input: AC 100~240 V, 50~60Hz Output: +12 V DC, 3 A
Power consumption	25 W (Typ.)
Power management	VESA DPMS Compatible

DIMENSIONS	
With VESA	532,5 (H) x 334,3 (W) x 50,5 (D) mm
WEIGHT (NET)	
With VESA	6,4 kg
ENVIRONMENT	
Operating temperature	0 - 40°C
Operation Humidity	5 - 90%
GENERAL	
Plug & Play	DDC2B
Incl accessories	AC/DC adapter - 1,5 m (black), Power cord - 1,8 m (black), VGA cable - 1,8 m (black), DVI-D cable 1,8m, DP cable 1,8m, DVID-HDMI adapter OPTIONS touch: Serial or USB cable touch - 1,8 m (black) Audio cable
Regulations	Safety: CE, UL, FCC
Warranty	5 years SendIT (excluding power supply)
Security	Kensington locking capability, Table locking (with stand)
OPTIONS	
Touch	Projective capacitive
Glass	Anti-reflective glass
Mounting	VESA (100 x 100) stand
ACCESSORIES	
Stands/brackets	POS-Pole, Wall bracket kit
Speakers	2 x 2.0 W, USB or Analog, HDMI input
MSR	MagTek 3 tracks, USB HID, USB-KeyB, Emu., Serial
Other	Power USB-hub

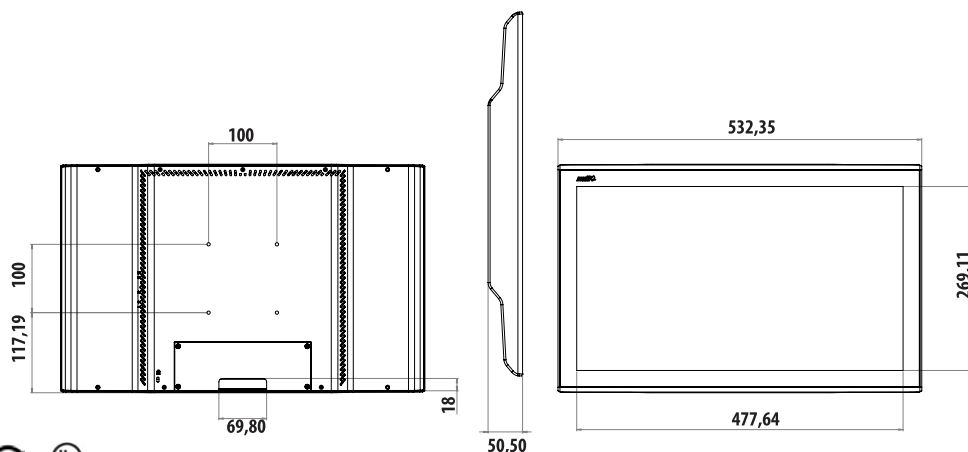

RoHS Compliant 2002/95/EG

©2017 MultiQ are registered trademarks or trademark applications of MultiQ International AB in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to change the specifications without prior notice.