



KEY FEATURES

- > Suited for public environments
- > Slim design
- > Possible to customize



MULTIQ 322 TRUEFLAT, MULTI-TOUCH

P-LINE

SUITED FOR PUBLIC ENVIRONMENTS

MultiQ have many years of experience within retail and public environment monitor installations. Based on this our monitors answer very well to the challenges of public environments.

MultiQ True-flat is designed for 24/7 operations and with its metal housing and anti-reflective glass this model is suited for point of sale, point of information and other public environment installations.

MODERN SLIM DESIGN

MultiQ True-flat has a new modern, slim design, with a frameless anti-reflective glass making touch functions even easier to use, maintain and more precise. The feel and touch of this product is similar to a tablet or smartphone but with a larger screen for superior user and customer experience.

MORE FEATURES

The MultiQ True-flat monitor saves energy costs and is environment friendly since it has power saving and lead free LED backlight. It also offers several features to improve ergonomics such as an adjustable tilt angle that also makes it possible to work while standing.

You can easily customize your monitor as MultiQ True-flat is a flexible platform with unique possibilities for customization: optional chassis color, logo in print or relief, card reader, integrated speakers etc.


You can also choose between antireflective glass or projected capacitive multi-touch depending on the intended use.

MULTIQ 322 TRUEFLAT

Technical specifications

P-LINE

DISPLAY		DIMENSIONS	
Panel Type	21,5", LCD TFT	With VESA	532,5 (H) x 334,3 (W) x 50,5 (D) mm
Backlight type	LED	WEIGHT (NET)	
Resolution	1920 x 1080	With VESA	6,4 kg
Brightness	300 cd/m ² (Typ.)	ENVIRONMENT	
Contrast ratio	3000:1 (typ.)	Operating temperature	0 - 40°C
Viewing angle	178° (H) x 178° (V) (CR 10:1, Typ.)	Operation Humidity	5 - 90%
Number of colors	16.7 Mill (RGB 8-bit)	GENERAL	
Response time	25 ms (Tye, on/off.)	Plug & Play	DDC2B
Pixel dimension	0,24825(H) x 0,24825 (V) mm	Incl accessories	AC/DC adapter - 1,5 m (black), Power cord - 1,8 m (black), VGA cable - 1,8 m (black), DVI-D cable 1,8m, DP cable 1,8m, DVID-HDMI adapter OPTIONS touch: Serial or USB cable touch - 1,8 m (black) Audio cable
OSD Control	Auto Set, Brightness, Contrast, Color, Position, Image, Miscellaneous	Regulations	Safety: CE, UL, FCC, VCCI, C-tick, EAC, CB
Hot keys functions	Control key locking, Quick brightness and contrast adjustment, Auto Set.	Warranty	3 years SwapIT
Lamp life	50.000 h (min)	Security	Kensington locking capability, Table locking (with stand)
MTBF	50.000 h	OPTIONS	
INPUT SIGNAL		Touch	Projective capacitive
Video signal	VGA: Analog 0,7 Vp-p. 75 ohm. DVI: REV 1.0 DisplayPort:Version 1.2	Glass	Anti-reflective glass
Sync. signal	TTL Level, Positive/Negative, Separate sync (VGA)	Mounting	VESA (100 x 100), stand
Connectors	VGA (15-pols D-sub), DVI-D (24-pole), DP, HDMI adapter, USB (Touch)	Speakers	2 x 2.0 W, USB or Analog, HDMI input
POWER		MSR	MagTek 3 tracks, USB HID
AC/DC adapter	Input: AC 100~240 V, 50~60Hz Output: +12 V DC, 3 A	ACCESSORIES	
Power consumption	25 W (Typ.)	Stands/brackets	Design stand, Wall bracket kit, Floor stand, POS-Pole
Power management	VESA DPMS Compatible		

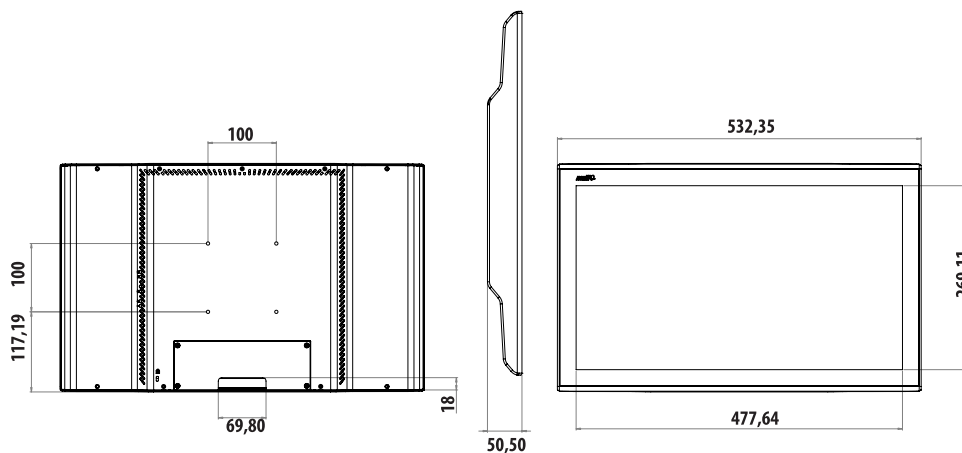

RoHS Comiliant 2002/95/EG

©2017 MultiQ are registered trademarks or trademark applications of MultiQ International AB in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to change the specifications without prior notice.