



Tailor made for retail and public environments

With the MultiQ 215, MultiQ have taken custom made monitor solutions for retail and public environments one step further. The product offers a solid, stable and very flexible display screen combined in a compact and elegant design. Metal housing and protective glass gives MultiQ 215 a unique durability.

Durability

MultiQ have many years of experience within retail and public environment monitor installations. Based on this our monitors answer to the challenges of public environments. MultiQ 215 is designed for 24/7 operation and is with its metal housing and protective glass shield in particular suitable for retail environments.

Environmental and Ergonomic

With the power saving and lead free LED backlight the MultiQ 215 LED saves energy costs and the environment. The MultiQ 215 also offers several features to improve the ergonomics and installation, such as that it may be ordered with antireflective glass and a range of touch alternatives. The extended tilting angle further improves the ergonomic options and makes it possible to work standing up.

Custom design

MultiQ 215 is a flexible platform with unique possibilities for customisation: optional chassis colour, logo in print or relief, card reader, integrated speakers etc.

MultiQ 215 LED

Technical specifications

P-line

Display	
Panel type	15.0", LCD TFT
Backlight type	LED
Active display area	304,1 (H) x 228,1 (V) mm
Resolution	XGA, 1024 x 768 max.
Brightness	350 cd/m ² (Typ.)
Contrast ratio	700:1 (Typ.)
Viewing angle	160° (H) x 130° (V) (CR 10:1, Typ.)
Number of colours	16.2 Mill, 6 bits + FRC
Response time	8 ms Tr+Tf (Typ.)
Pixel dimension	0,297 (H) x 0,297 (V) mm
OSD Control	Auto Set, Brightness, Contrast, Colour, Position, Image, Miscellaneous.
Hot keys functions	Control key locking, Quick brightness and contrast adjustment, Auto Set.
Lamp life	50.000 h (min)
MTBF	50.000 h

Input Signal	
Video signal	Analog 0,7 Vp-p. 75 ohm
Sync. signal	TTL Level, Positive/Negative, Separate sync (VGA)
Connector	VGA (15-pols D-sub), DC-in

Power	
AC/DC adapter	Input: AC 100~240 V, 50~60Hz Output: +12 V DC, 3 A
Power consumption	14,5W (Typ.)
Power management	VESA DPMS Compatible

Dimension	
With stand	317 (H) x 356 (W) x 129 (D) mm
With VESA	283 (H) x 356 (W) x 49 (D) mm
Tilt with stand	+70°,-0°

Weight (Net)	
With stand	5,6 kg
With VESA	4,5 kg


Environment	
Operating temperature	0 - 40°C
Transport & Storage	Ambient Temp: -10 - +60°C Humidity Range: 10 - 100%

General	
Plug & Play	DDC2B
Included accessories	AC/DC adapter - 1,5 m (black), Power cord - 1,8 m (black), VGA cable - 1,8 m (black). OPTIONS Touch: Serial or USB cable - 1,8 m (black).
Regulations	CE, UL
Warranty	3 years SendIT
Security	Table locking (stand), Kensington locking capability.

Options	
Different models	
Touch	Resistive, Capacitive
Glass	Anti reflex glass
Mounting	VESA (75 x 75 mm), Stand

Additional accessories	
Swivel plate, POS-Pole, Wall bracket kit	

Project options	
Speakers	2 x 1,5 W, Serial or USB input
MSR	MagTek 3 tracks, USB, USB-KeyB, Serial
Other	Power USB-hub, Switches in the front, Protective film for resistive touch

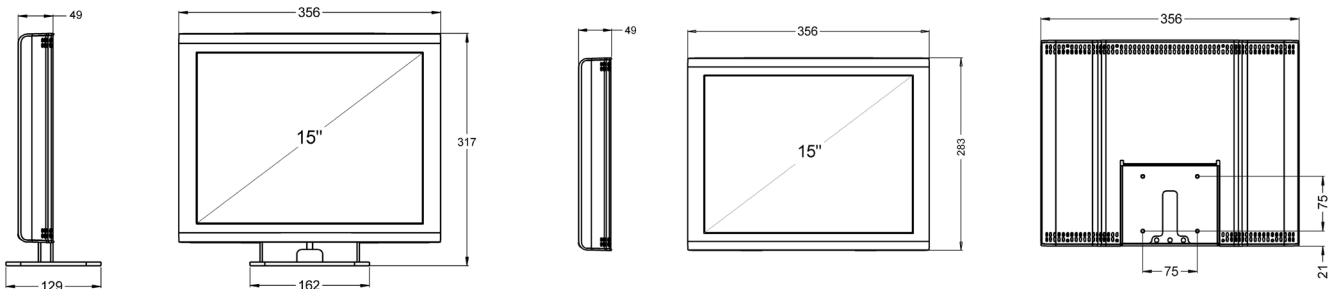

RoHS Compliant 2002/95/EG

©2013 MultiQ are registered trademarks or trademark applications of MultiQ International AB in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to change the specifications without prior notice.