



## Tailor made for retail and public environments

With the MultiQ 219, MultiQ have taken custom made monitor solutions for retail and public environments one step further. The product offers a solid, stable and very flexible display screen combined in a compact and elegant design. Metal housing and protective glass gives MultiQ 219 a unique durability even in the most demanding environments

### **Durability**

MultiQ have combined many years of experience from retail and public environments with high demands from our customers. The result is a monitor that answers very well to the challenges of public environments. MultiQ 219 is designed for 24/7 operation (24 hours a day, 7 days a week) and is suitable for retail environment with its metal housing and glass shield to protect the sensitive screen. The monitors are prepared for

Kensington lock and can be mounted onto the surface when using stand. With MultiQ 219 you can easily hide the cables through the stand and, for example down under the table.

### **Ergonomics**

With the power saving and lead free LED backlight the MultiQ 219 LED saves energy costs and the environment. The MultiQ 219 also offers several features to improve the ergonomics and installation, such as that it may be ordered with antireflective glass and a range of touch alternatives. The extended tilting angle further improves the ergonomic options and makes it possible to work standing up.

### **Custom design**

MultiQ 219 is a flexible platform with unique possibilities for customization: optional chassis colour, logo, card reader, speakers, switches on the front or the back etc.

# MultiQ 219 LED


## Technical specifications

## P-Line

Display	
Panel Type	19,0" LED TFT
Backlight type	LED
Resolution	SXGA, 1280 x 1024 max.
Brightness	350cd/m2 (typ.)
Contrast ratio	1000:1 (typ.)
Viewing angle	H: 170° Typ. (CR 10:1) V: 160° Typ. (CR 10:1)
Number of colors	16.7 Mill
Response time	5 ms (Typ.)
Pixel dimension	0.294 (H) x 0.294 (V) mm
OSD Control	H/V Position, Clock, Phase, Auto config. Input, System info, Recall, Sharpness, Brightness, Contrast, Colour, Sharpness, OSD Adjust, Exit.
Hot keys functions	Control key locking, Quick brightness and contrast adjustment, Auto set.
Lamp life	50.000 h (Typ.)
MTBF	50.000 h
Input signal	
Video Signal	Analog 0,7 Vp-p. 75 ohm.
Sync. signal	TTL Level, Positive/Negative, Separate sync (VGA)
Connector	VGA (15-pols D-sub), DC-In
Power	
AC/DC adapter	Input: AC 100 ~ 240 V, 50 ~ 60 Hz Output: + 12 V DC, 3 A
Power consumption	TBD
Power management	VESA DPMS Compatible, Energy Star
Dimension	
With stand	394,4 (H) x 428 (W) x 157,5 (D) mm
With VESA	359(H) x 428(W) x 555,9 (D) mm
Tilt with stand	+70°, -0°

Weight (Net)	
With stand	9,2 kg
With VESA	7,5 kg
Environment	
Operating temperature	0 - 40°C
Transport & Storage	Ambient Temp: -10°C - +60°C Humidity Range: 10 - 100%
General	
Plug & Play	DDC1/2B
Included accessories	AC/DC adapter – 1,5 m (black), Power cord – 1,8 m (black), VGA cable – 1,8 m (black), OPTIONS Touch: Serial or USB cable – 1,8 m black)
Regulations	Safety: UL/Tüv-GS, EMI: CE/FCC, ISO 13406-2, CCC, CE approved power supply
Warranty	3 years SendIT
Security	Table locking (stand), Kensington locking capability.

Options	
Different models	
Touch	Resistive, Capacitive
Glass	Anti reflex glass
Additional accessories	
Swivel plate, POS-Pole, Wall bracket kit	
Project options	
Speakers	2 x 1,5 W Serial or USB input
MSR	MagTek 3 tracks, USB HID, USB- KeyB Em., Serial
Other	Power USB-hub, Switches in the front, Privacy film

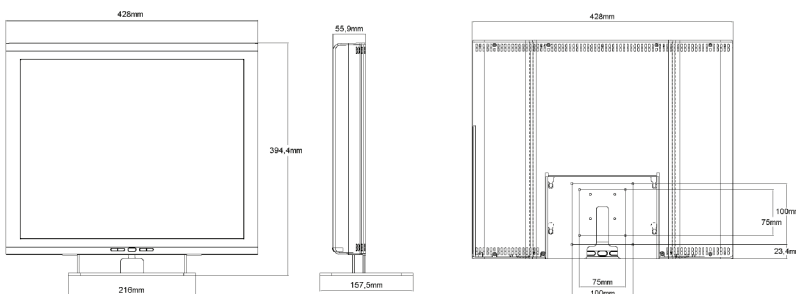

RoHS Compliant 2002/95/EG

©2013 MultiQ are registered trademarks or trademark applications of MultiQ International AB in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to change the specifications without prior notice.