



#### KEY FEATURES

- > Suited for public environments
- > Durable design
- > Environmentally friendly



## MULTIQ 219 Monitor

P-LINE

### **TAILOR MADE FOR RETAIL AND PUBLIC ENVIRONMENTS**

With the MultiQ 219, MultiQ have taken custom made monitor solutions for retail and public environments one step further. The product offers a solid, stable and very flexible display screen combined in a compact and elegant design. Metal housing and protective glass gives MultiQ 219 a unique durability.

### **DURABILITY**

MultiQ have many years of experience within retail and public environment monitor installations. Based on this our monitors answer to the challenges of public environments. MultiQ 219 is designed for 24/7 operation and is with its metal housing and protective glass shield in particular suitable for retail environments.

### **ENVIRONMENTAL AND ERGONOMIC**

With the power saving and lead-free LED backlight the MultiQ 219 LED saves energy costs and the environment. The MultiQ 219 also offers several features to improve the ergonomics and installation, such as that it may be ordered with antireflective glass and a range of touch alternatives. The extended tilting angle further improves the ergonomic options and makes it possible to work standing up.

### **CUSTOM DESIGN**

MultiQ 219 is a flexible platform with unique possibilities for customization; optional chassis color, logo in print or relief, card reader, integrated speakers etc.

# MULTIQ 219 Monitor

## Technical specifications

P-LINE

201712/ENG/R1A

### DISPLAY

Panel Type	19,0", LCD TFT
Backlight type	CCFL
Resolution	SXGA, 1280 x 1024 max.
Brightness	300 cd/m <sup>2</sup> (Typ.)
Contrast ratio	1500:1 (typ.)
Viewing angle	178° (H) x 178° (V) (CR 10:1, Typ.)
Number of colors	16.7 Mill (6-bits + FRC)
Response time	8 ms GTG (Typ.)
Pixel dimension	0,294 (H) x 0,294 (V) mm
Lamp life/MTBF	50.000 h (Typ)
OSD Control	H/V Position, Clock, Phase, Auto config. Input, System info, Recall, Sharpness, Brightness, Contrast, Color, OSD Adjust, Exit
Hot keys functions	Control key locking, Quick brightness and contrast adjustment, Auto Set.

### INPUT SIGNAL

Video signal	Analog 0,7 Vp-p. 75 ohm
Sync. signal	TTL Level, Positive/Negative, Separate sync (VGA)

### POWER

AC/DC adapter	Input: AC 100~240 V, 50~60Hz Output: +12 V DC, 3 A
Power consumption	18 W (typ),
Power management	VESA DPMS Compatible, Energy Star

### DIMENSIONS

With VESA	359 (H) x 428 (W) x 555,9 (D) mm
With stand	394,4 (H) x 428 (W) x 157,5 (D) mm
Tilt with stand	+ 70°, -0°

### WEIGHT (NET)

With VESA	7,5 kg
With stand	9,2 kg

### ENVIRONMENT

Operating temperature	0 - 40°C
Transport & Storage: Humidity Range	10 - 00%
Ambient Temp:	-10 - + 60°C

### GENERAL


Incl accessories	AC/DC adapter - 1,5 m (black), Power cord - 1,8 m (black), VGA cable - 1,8 m (black) Options: Serial or USB cable - 1,8 m (black)
Regulations	CE, UL, FCC, ISO 13406-2, CCC, CEL, CE, VCCI
Warranty	3 years SendIT
Plug & Play	DDC1/2B
Security	Kensington locking capability, Table locking (with stand)

### OPTIONS

Touch	Projected Capacitive, 2-point
Glass	Anti-reflex glass
Speakers	2 x 1,5 W, Serial or USB input
MSR	MagTek 3 tracks, USB HID, USB-KeyB Em, Serial
Other	Power USB-hub, Switches in the front, Protective film for resistive touch

### ACCESSORIES

Stands/brackets POS-Pole, Wall bracket kit, Swivel plate

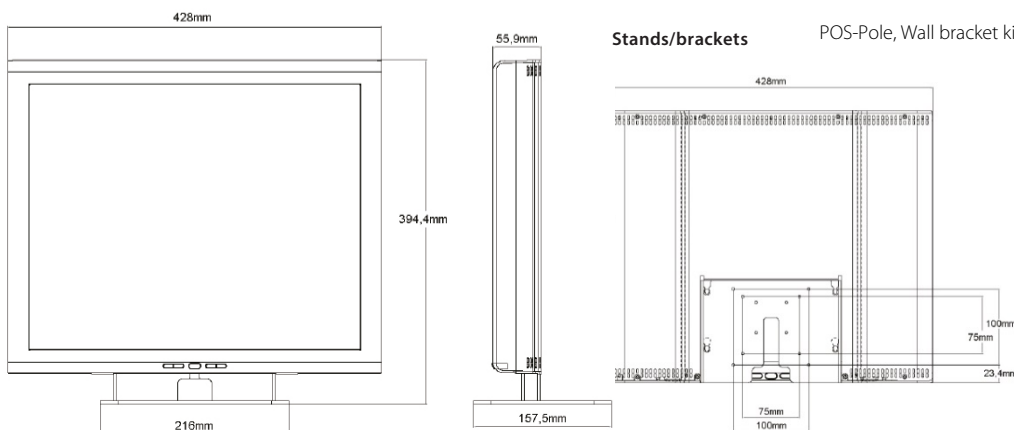

RoHS Compliant 2002/95/EG

©2017 MultiQ are registered trademarks or trademark applications of MultiQ International AB in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to change the specifications without prior notice.